


OMN104

JOB# _____

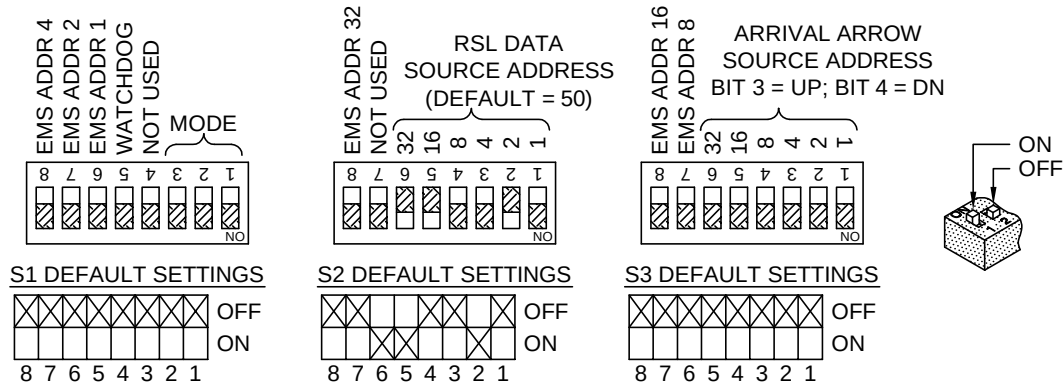

CE3564 ____ ARM CODE VERSION _____

CE3249 ____ MINI CODE VERSION _____


DESIGN VERSION _____

AUDIO VERSION _____

CRCG _____ OCDL CRC _____

CRCA _____ ODAA CRC _____

EMS ADDRESS							
EXAMPLE: EMS ADDR 37	ON (32)	OFF (0)	OFF (0)	ON (4)	OFF (0)	ON (1)	32+4+1=37
SWITCH (BIT VALUE)	S2-8 (32)	S3-8 (16)	S3-7 (8)	S1-8 (4)	S1-7 (2)	S1-6 (1)	

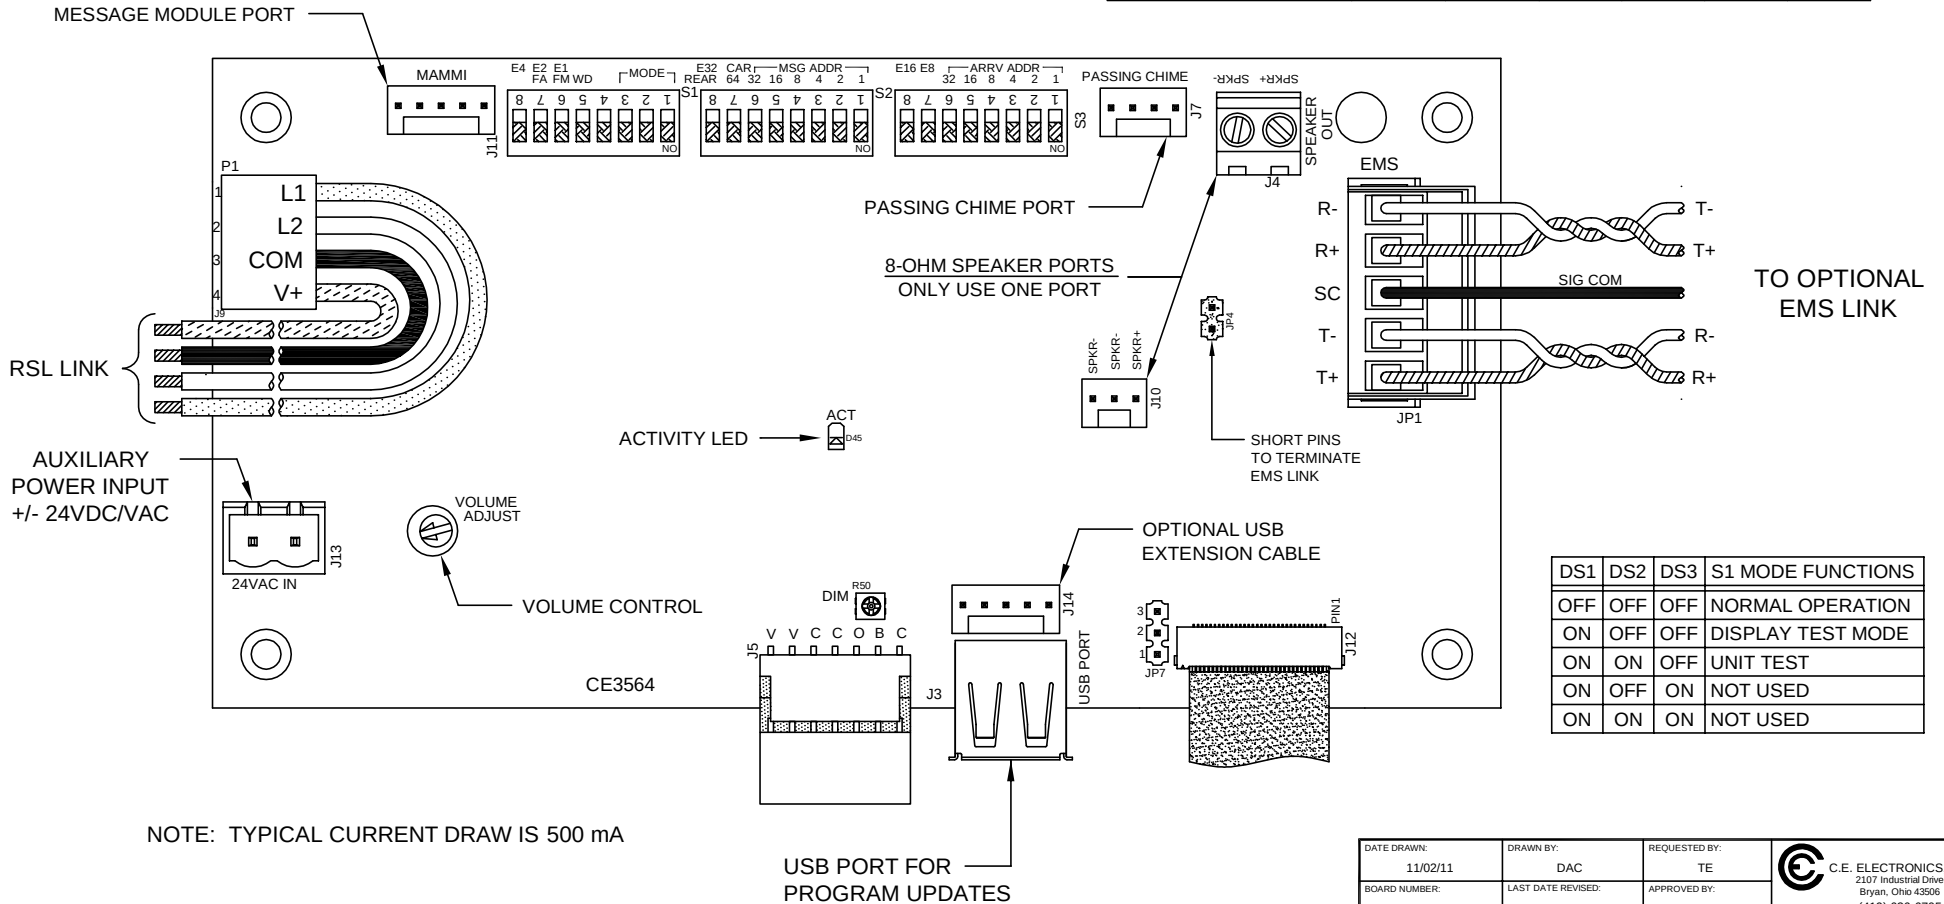

NOTE: TYPICAL CURRENT DRAW IS 500 mA

DATE DRAWN: 11/02/11	DRAWN BY: DAC	REQUESTED BY: TE	 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43506 (419) 636-6705
BOARD NUMBER: 3249, 3564	LAST DATE REVISED: -	APPROVED BY:	
PRODUCT	OMN104 MINI-TFT DISPLAY	DWG. NO. OMNTFT_01	
		REV. -	

The serial link must contain the following Otis data at the specified addresses for the display to work properly. Select the RSL Data address by setting S2, DIP switches 1-6 using the binary number for the desired address. The board reads five continuous addresses beginning with the address determined by the DIP switch setting. For example, if the DIP switch is set to address 50 (default), the board reads the bits at addresses 50-54.

DIP switch address - selected by the S2 DIP switch on the unit (Default 50):

Bit 1 - FDO	Front Door Open	>>>>>	Either of these will activate the play voice strobe, but also control which lantern inputs are read.
Bit 2 - RDO	Rear Door Open	>>>>>	
Bit 3 - Not Used			
Bit 4 - LPT	Landing Passing Tone		Passing Chime

DIP switch address +1 (Default 51):

Bit 3 - CUML	Car Up Motion Lamp	Travel Up Arrow
Bit 4 - CDML	Car Down Motion Lamp	Travel Down Arrow

DIP switch address +2 (Default 52):

Bit 1 - SESL	Fire Hat Jewel in COP	<u>Priority</u> 1
Bit 2 - FSL/RFSL	Fire Service Lamp	2
Bit 3 - FNDG/RNDG	Front/Rear Nudging	3
Bit 4 - ISCL	Independent Service Lamp	4

DIP switch address +3 (Default 53):

Bit 1 - OLS	Overload Lamp	5
Bit 2 - Available	Message Six	6
Bit 3 - Available	Message Seven	7
Bit 4 - Available	Message Eight	8

DIP switch address +4 (Default 54):

Bit 3 and bit 4 contain Lantern UP and Lantern DOWN data when the arrival arrow address on S3 is set to zero.

NOTE: At DIP switch address +1 and +4, bits 1 and 2 are not used. Also, the messages listed at DIP switch address +2 and +3 are the default messages, but any signal can be used to trigger a message at the corresponding bit location.

Set the EMS Address (if used) using the following DIP switches in a binary format: S1-6 (1), S1-7 (2), S1-8 (4), S3-7 (8), S3-8 (16), and S2-8 (32).

Signal Name	GEN2 - E311M/E411M - GEM/MVS - E335M	LRVF - 211M/LVM
FDO	437	181
RDO	438	182
LPT	393	137
CUML	468	212
CDML	467	211
FSL	387	131
RFSL	416	160
FNDG	441	185
RNDG	442	186
FSILC	-	195
ISCL	389	133
OLS	396	140
PFL	397	141
EQL	383	127
CDLU	380	124
CDLD	378	122
RCDLU	401	145
RCDLD	399	143
CDLU2	754	259
CDLD2	755	258
RCDLU2	756	261
RCDLD2	757	260

NOTE: The CDLX2 signal is not HLSET dependent and is preferred for CE fixtures.

For destination-based systems, please contact C.E. Electronics Customer Service (419-636-6705) for more information.