




C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ccelectronics.com

EV110-XXXXX

Ver. 4 Rel. 02/09/2012



EUROPEAN
SERIES

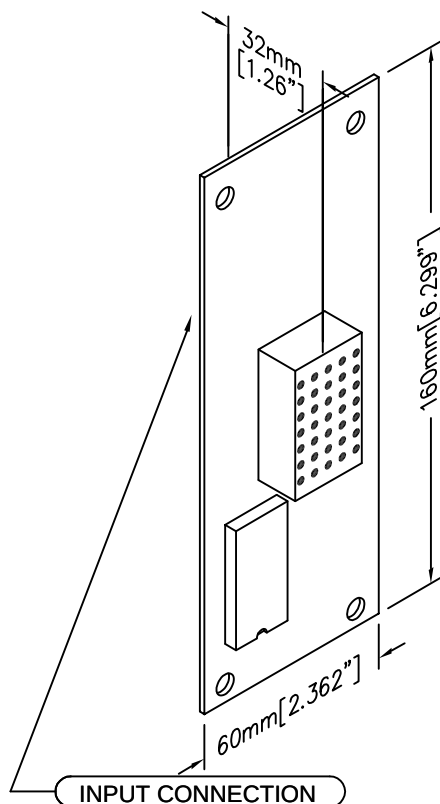

SCREW TYPE INPUT CONNECTOR
12-24VAC/DC INPUT POWER
AND SIGNAL INPUTS

RENEWAL PARTS

Lens: 104-5582 RED
Lens: 104-6107 GRAY
Lens: 104-9107 BLUE

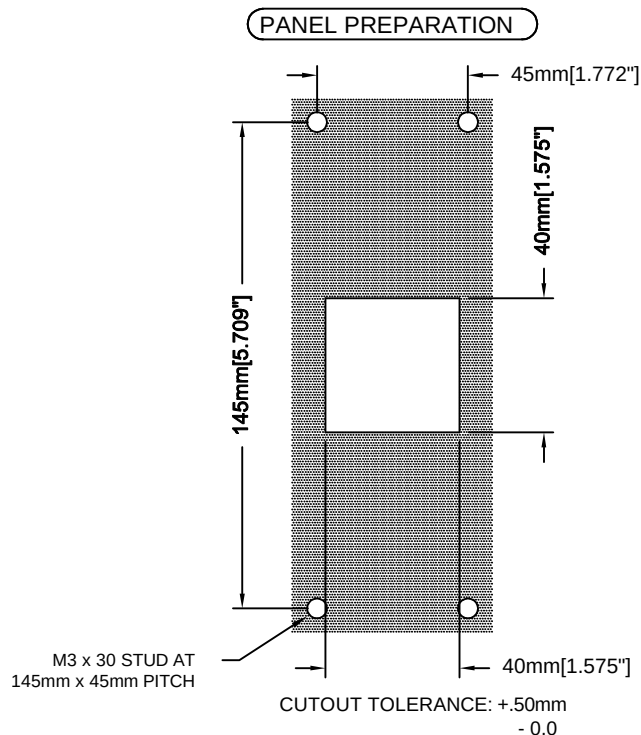

30mm [1"] CHARACTER

DOT MATRIX

Dot Matrix LED Digital Indicator for floor position display.
Any alphanumeric or custom character can be displayed.

Typical Applications:

- Car-OP Panel
- Transom-car or Hall

Features:

- Low cost design
- Latched input
- Scrolling & roll over
- Hall lantern option
- Passing chime output
- Self Testing
- Message inputs
- Error detection and correction feature

TO ORDER - SPECIFY EV110 - X X X X X

COLOR:

"R" = RED
"A" = AMBER
"G" = GREEN
"B" = BLUE
"W" = WHITE

LENS:

"R" = RED
"G" = GRAY
"B" = BLUE
"X" = NO LENS

NUMBER OF INPUTS:

"1" = 7 INPUT
"M" = MICRO COMM 3 WIRE INPUT *
"P" = MICRO COMM INPUT W/ PASSING CHIME *
"S" = BOTH DIRECT & MICRO COMM INPUT

SIGNAL VOLTAGE:

"A" = POSITIVE 6-20VAC/DC, 24VAC
"B" = POSITIVE 24-48VDC, 48VAC
"C" = POSITIVE 120VAC
"D" = POSITIVE 125VDC
"E" = NEGATIVE 6-20VDC
"F" = NEGATIVE 24-48VDC
"G" = NEGATIVE 125VDC
"X" = NO SELECTION

SIGNAL FORMAT:

"1" = SINGLE LINE/FLOOR
"2" = BINARY
"4" = GRAY CODE
"6" = SPECIAL
"X" = NO SELECTION

NOTE:

1. If a special voltage is required, please consult factory.
2. A supply of 12-24VAC/DC positive or negative is also required.

*3. This is not a stand alone unit. Must be used in conjunction with a Micro Comm interface.