




OMN57-BXX

JOB# _____



NOTE: TYPICAL
CURRENT DRAW IS
350 mA at 24 VDC




S1 DEFAULT SETTINGS




S2 DEFAULT SETTINGS



S3 DEFAULT SETTINGS



DS1	DS2	DS3	S1 MODE FUNCTIONS
OFF	OFF	OFF	NORMAL OPERATION
ON	OFF	OFF	DISPLAY TEST MODE
ON	ON	OFF	AUDIO / UNIT TEST MODE

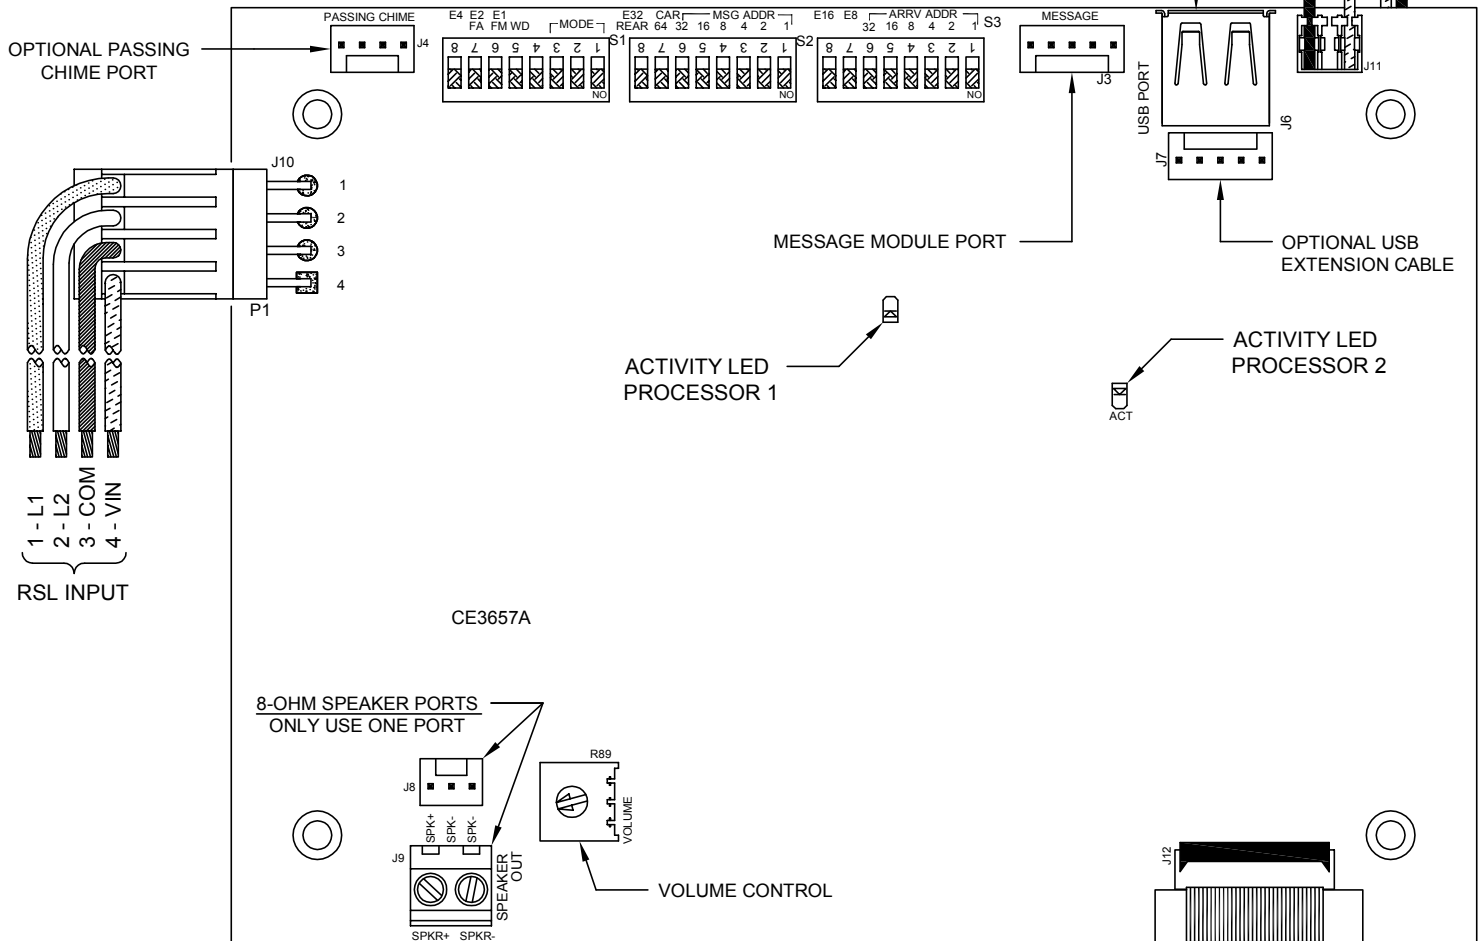

DIP Switches S2 and S3:
DS1 - DS6 set the unit's Addresses

DS6 (32)	DS5 (16)	DS4 (8)	DS3 (4)	DS2 (2)	DS1 (1)	ADDRESS
0	0	0	0	0	0	1
0	0	0	0	0	1	2
0	0	0	0	1	0	3
0	0	0	0	1	1	4
0	0	0	1	0	0	5
0	0	0	1	0	1	6
:	:	:	:	:	:	:
:	:	:	:	:	:	:
1	1	1	1	0	1	62
1	1	1	1	1	0	63
1	1	1	1	1	1	64

To set the RSL or Arrival Arrow Address, subtract one (1) from the required address number and then set the DIP switches for the resulting number, using the values shown at the top of the column. For example, Address 50 is (50-1=49), then DS6 (32), DS5 (16), and DS1 (1). 32+16+1=49.

CE3657 ____ ARM CODE VERSION _____

DESIGN VERSION _____

AUDIO VERSION _____

CRCG _____

CRCA _____

OCDL CRC _____

ODAA CRC _____

DATE DRAWN: 04/02/13	DRAWN BY: DAC	REQUESTED BY: TE	C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43506 (419) 636-6705
BOARD NUMBER: 3657	LAST DATE REVISED: -	APPROVED BY:	
PRODUCT OMN57-BXX UNIBOARD 5.7" TFT RA RSL INPUT			
DWG. NO. XMN57_01			REV. -