




C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ceelectronics.com

EV115-XXXXX

Ver. 5 Rel. 02/09/2012


EUROPEAN
SERIES

PANEL PREPARATION

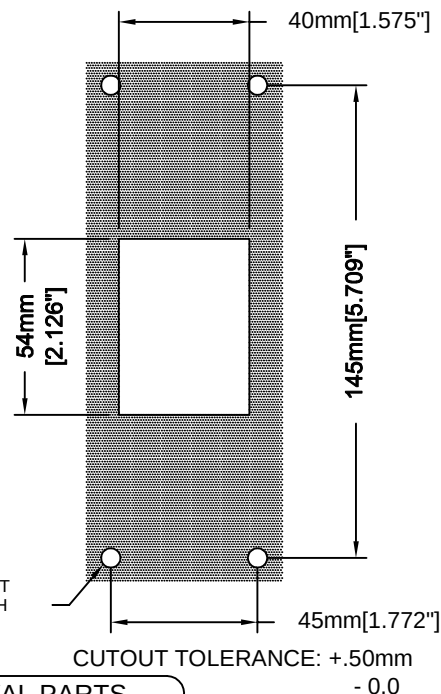


RENEWAL PARTS

Lens: 104-5657 RED
Lens: 104-6109 GRAY
Lens: 104-9109 BLUE



45mm [1.5"] CHARACTER

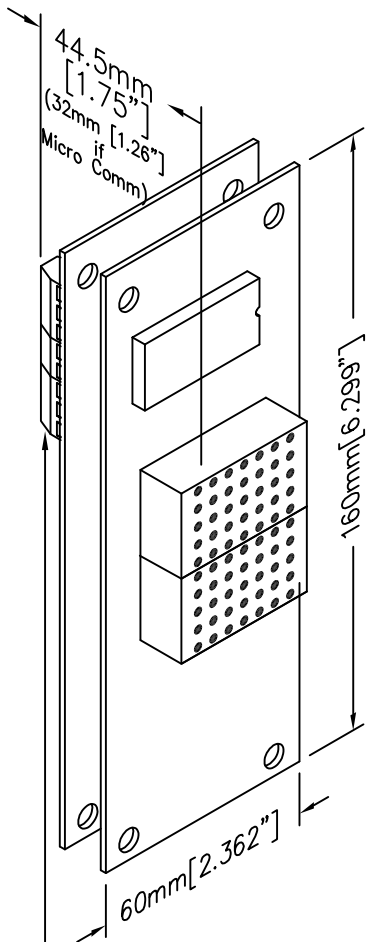

INPUT CONNECTION

SCREW TYPE INPUT CONNECTOR
12-24VAC/DC INPUT POWER
AND SIGNAL INPUTS

NOTE:

1. If a special voltage is required, please consult factory.
2. A supply of 12-24VAC/DC positive or negative is also required.

*3. This is not a stand alone unit. Must be used in conjunction with a Micro Comm interface.

DOT MATRIX

Dot Matrix LED Digital Indicator for floor position display, as well as car direction, if desired. Any alphanumeric or custom character can be displayed in single digit floor designations.

Typical Applications:

- Car-OP Panel
- Transom-car or Hall

Features:

- Low cost design
- Self contained unit
- Latched input
- Scrolling & roll over
- Hall lantern option
- Passing chime output
- Self Testing
- Message inputs
- Error detection and correction feature

TO ORDER - SPECIFY EV115 - X X X X X

COLOR:

"R" = RED
"A" = AMBER
"G" = GREEN
"B" = BLUE
"W" = WHITE

LENS:

"R" = RED
"G" = GRAY
"B" = BLUE
"X" = NO LENS

NUMBER OF INPUTS:

"1" = 8 INPUT
"2" = 15 INPUT
"M" = MICRO COMM 3 WIRE INPUT *
"P" = MICRO COMM INPUT W/ PASSING CHIME *
"S" = BOTH DIRECT & MICRO COMM INPUT

SIGNAL VOLTAGE:

"A" = POSITIVE 6-20VDC, 6-24VAC
"B" = POSITIVE 24-48VDC, 24-48VAC
"C" = 120VAC
"D" = POSITIVE 125VDC
"E" = NEGATIVE 6-20VDC
"F" = NEGATIVE 24-48VDC
"G" = NEGATIVE 125VDC
"X" = IF MICRO COMM

SIGNAL FORMAT:

"1" = SINGLE LINE/FLOOR
"2" = BINARY
"4" = GRAY CODE
"6" = SPECIAL
"X" = NO SELECTION