




C.E. Electronics, Inc.
2107 Industrial Drive
Bryan, OH 43506
PH (419) 636-6705 FX (419) 636-2516
www.ccelectronics.com

SECXX-XXXX

Ver. 2 Rel. 04/16/2018

SECURITY
BUTTON INTERFACE

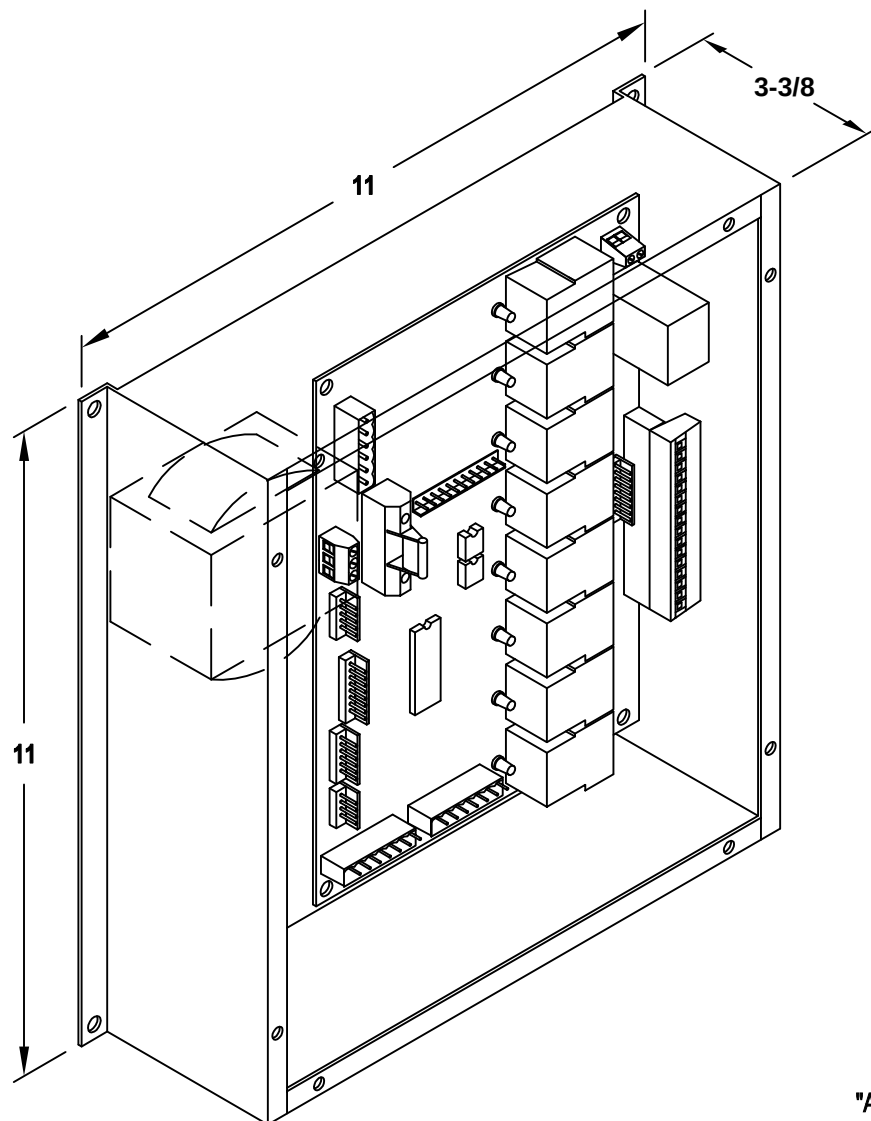

SECURITY

This system was designed to allow up to 32 secured landings when the unit is activated. It disables the landing through a relay that is wired in circuits. When the appropriate code is entered, the relay closes for a predetermined (adjustable) time. It then allows the user to input the floor or floors that he has been given access. An on board override will de-activate the unit as long as an external input signal is present. An optional module can activate or de-activate the system at programmable times during the day.

Features

- Up to 32 landings
- Override input
- Field programmable
- Pluggable connections
- Keypad/Card reader or elevator button access
- Custom graphics or photo ID cards available
- Optional programmable timer
- Access to multiple floors, 6 digit codes with up to 600 users

TO ORDER - SPECIFY SECXX- X X X X

"04" = 4 LANDINGS
"08" = 8 LANDINGS
"16" = 16 LANDINGS
"20" = 20 LANDINGS
"24" = 24 LANDINGS
"32" = 32 LANDINGS

VERRIDE INPUT SIGNAL VOLTAGE:

"A" = 6-20VAC/DC, 24VAC
"B" = 24-48VDC
"C" = 120VAC
"D" = 125VDC
"S" = DRY CONTACT

MOUNTING:

"1" = APPLIED METAL w/o BACK BOX
"2" = APPLIED METAL w/ BACK BOX
"3" = SURFACE MOUNT WITH SECXX
"X" = NO FIXTURE
"C" = CUSTOM FIXTURE

PROGRAM CABLE:

"C" = HAND HELD ATTENDANT CABLE - 20'
"X" = NO CABLE NEEDED

INTERFACE / VISUAL FEEDBACK:

"A" = KEYPAD & LED
"C" = CARD READER & LED
"E" = SWIPE READER & LED
"I" = PROXIMITY READER & LED
"R" = KEYPAD & LED CABLES 12 INCH (RESIDENTIAL)

NOTE:

1. If a special voltage is required, please consult factory.
2. If needing over 16 landings, please consult factory.