


REMOTE TFT

JOB# _____

* - ITEMS INSTALLED ON VIDEO VERSION ONLY

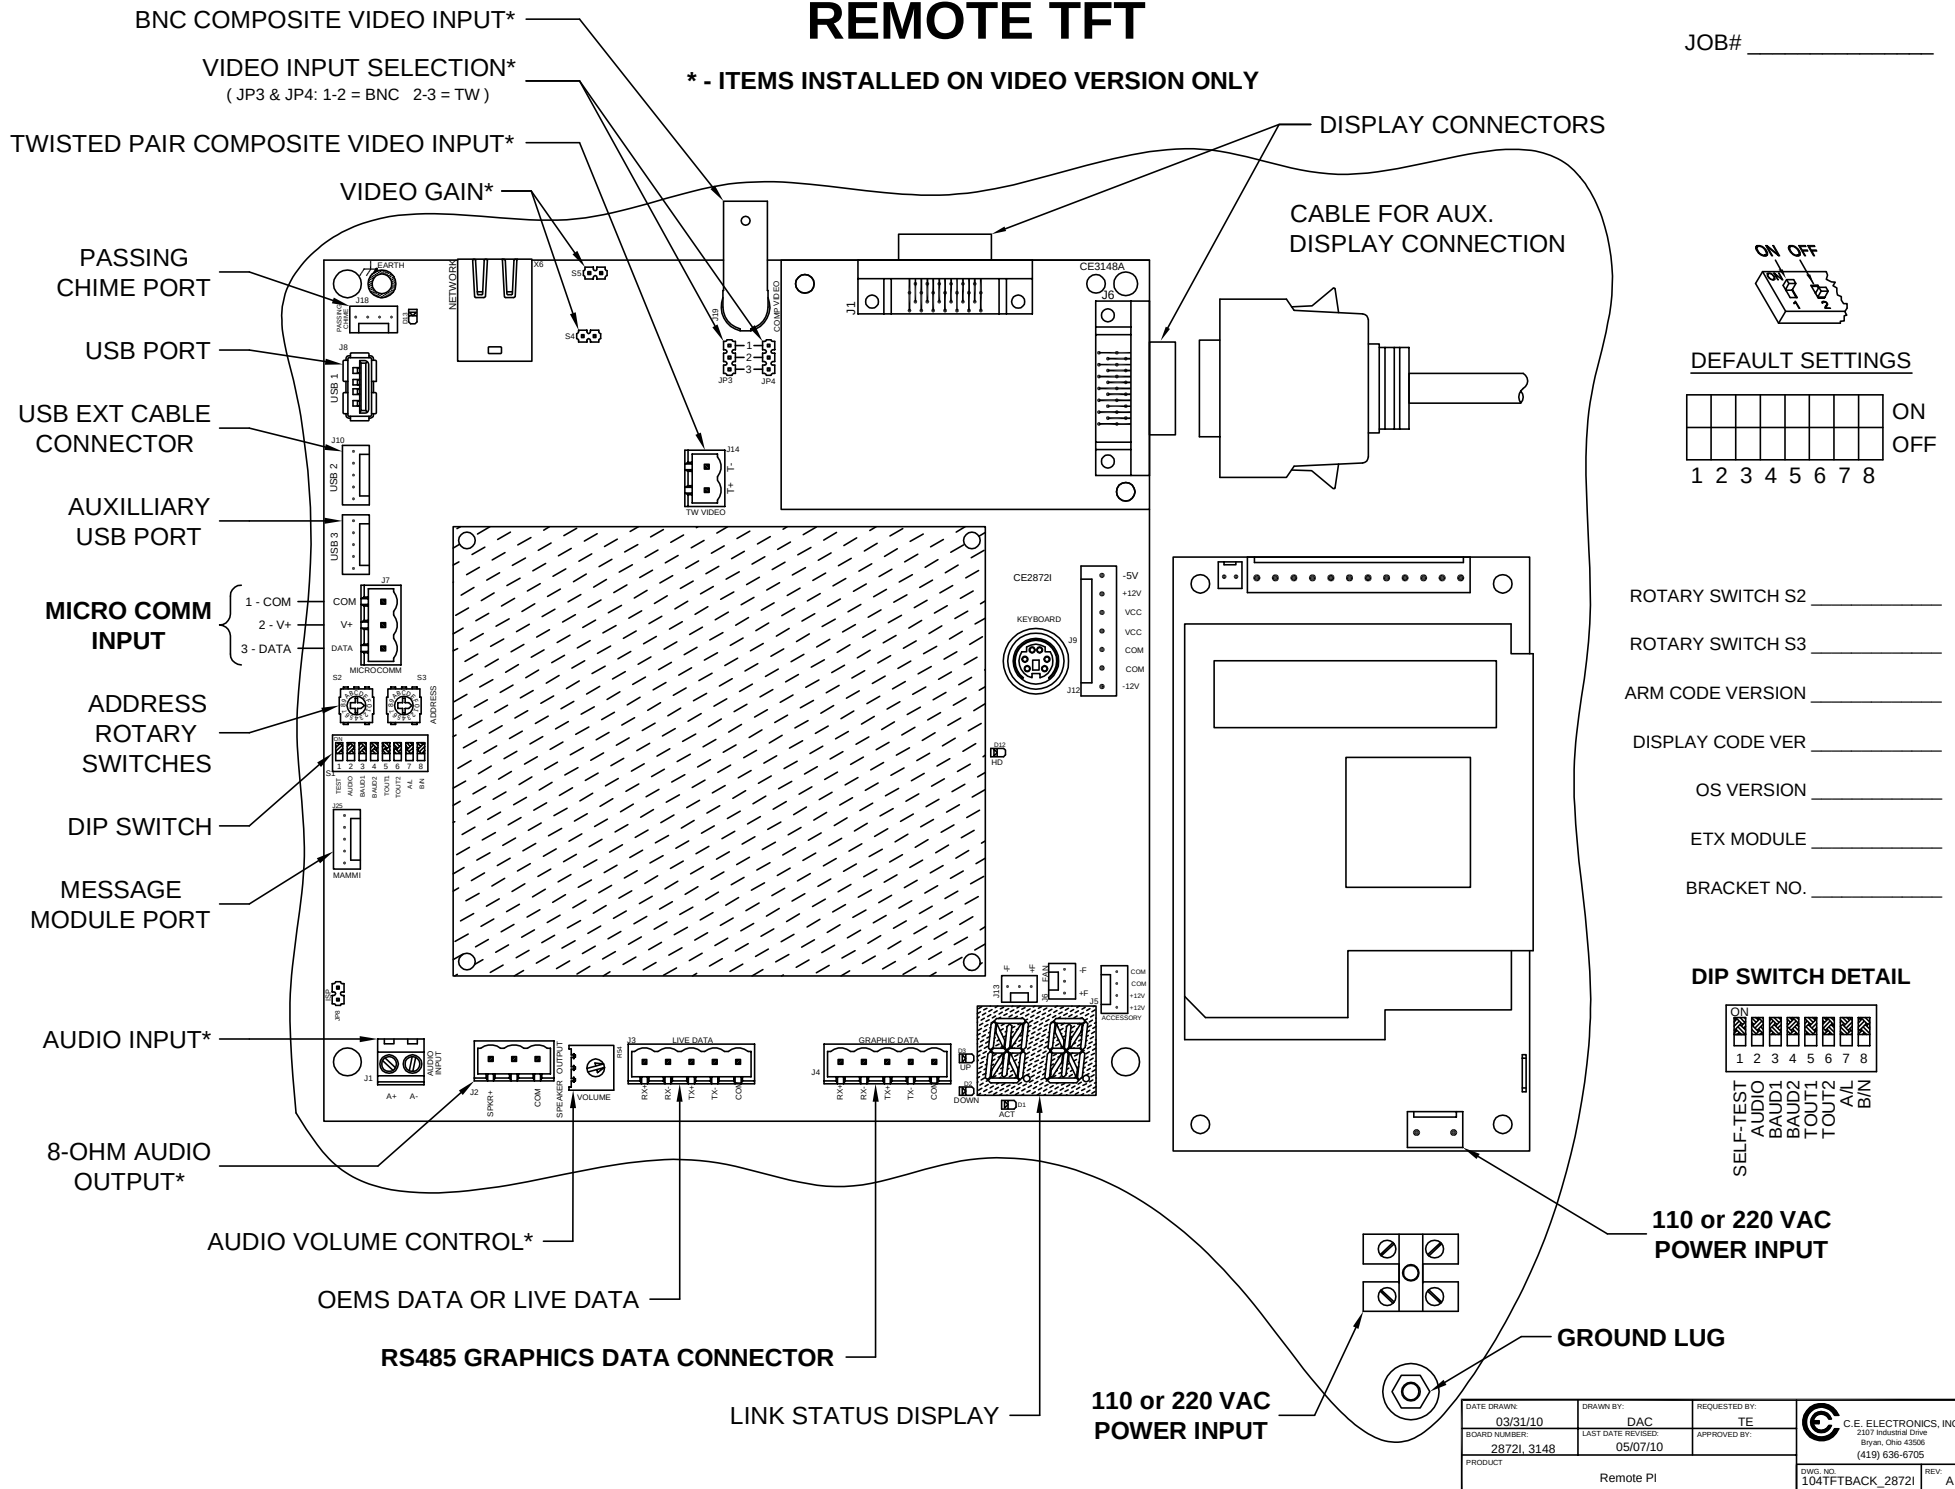

DATE DRAWN: 03/31/10	DRAWN BY: DAC	REQUESTED BY: TE	 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43906 (419) 636-6705
BOARD NUMBER: 28721, 3148	LAST DATE REVISED: 05/07/10	APPROVED BY:	
PRODUCT:	Remote PI	REV:	

NORMAL RUN MODE

DIP SWITCH SETTINGS

DIP Switch 1 - Test Mode

Off = Normal Run Mode

On = Test Mode. The display will cycle up and down through all programmed floors (Front Side Only).

DIP Switch 2 - Audio Output

Off = Audio Software Controlled

On = Audio Enabled

DIP Switch 4, 3 - RS485 Configuration Link Baud Rate (Must match Transfer Program)

DS4	DS3	BAUD RATE
OFF	OFF	9600 (Default)
OFF	ON	19200
ON	OFF	38400
ON	ON	57600

DIP Switch 6, 5 - Watchdog Period (Length of time PIC waits for response from Elite display before resetting the display)

DS6	DS5	Wait Period
OFF	OFF	One Minute
OFF	ON	Two Minutes
ON	OFF	Three Minutes (Default)
ON	ON	Never Reset Display

DIP Switch 7 - Converter Board Display Mode (does not affect TFT screen)

Off = Scan Slot Data Displayed

On = ASCII Data Displayed

NOTE: Left Cube Dot = Priority Message Present

Right Cube Dot = Door Strobe Active

DIP Switch 8 - Single/Multi-Car

Off = Single Car

On = Multi-Car

ROTARY SWITCH SETTINGS

Rotary Switch S2 - Used for USB transfers. Default setting is 0.


Rotary Switch S3 - Unit Address

This switch sets the address of the Elite PI unit. The default is address 1, which is switch setting 0.

NOTE: This address must match the Transfer program setting.

S3	Unit Address	S3	Unit Address
0	1	8	9
1	2	9	10
2	3	A	11
3	4	B	12
4	5	C	13
5	6	D	14
6	7	E	15
7	8	F	16

CAR JUNCTION BOARD to ELITE PI and (if needed) to ELITE PI

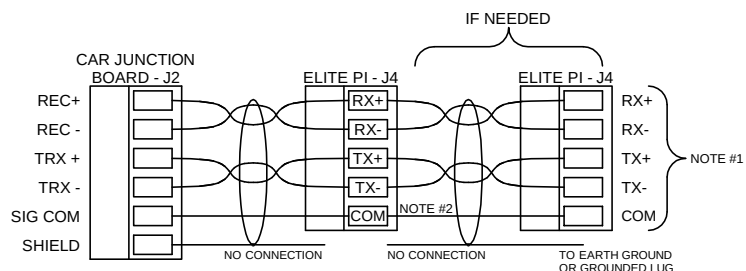

VIDEO TEST MODE

Video test mode uses a combination of DIP switch and rotary switch settings. Please write down the initial setting of the S2 and S3 rotary switches before starting this process.

Entering Video Test Mode

Set DIP switch 1 to OFF, then set S2 and S3 to position F. Next, set DIP switch 1 to ON. The Live Video Adjustment menu will appear on the screen with Brightness highlighted.

Choosing Item to Adjust

The highlighted item is the current selection. To choose a different item to adjust, set S2 as shown below:

S2	Adjustment	S2	Adjustment
F	Brightness	B	Video Standard
E	Contrast	A	Vertical Stretch
D	Color	9	Default
C	Tint	8	Original

Making Adjustments

Highlight the item to change and turn S3 for the best display quality.

Default and Original Settings

Default will reset the display to the factory default settings, and Original will cancel any changes made and restore the values stored before entering Video Test mode. Highlight the item to use, turn S3 in either direction, and wait five seconds. The display will reset to the default or previous settings.

Exiting Video Test Mode

To save the new video settings and exit Video Test, set DIP switch 1 to OFF. Reset S2 and S3 to the values recorded before starting the process.

Video Gain

S5 and S4 control the video gain. Use a shunt to short the pins of the switches as shown in the table below (OFF = No Shunt, ON = Shunt):


S5	S4	VIDEO GAIN
OFF	OFF	No Gain (Default)
OFF	ON	Lowest Gain
ON	OFF	
ON	ON	Highest Gain

Adjusting Audio Volume

If audio is needed, connect an 8-ohm speaker to J1 on the converter board. Set the volume by adjusting Volume pot R2 (3/4-turn pot). Adjust the pot clockwise to increase the volume.

MICRO COMM LINK

(18-GAUGE WIRE)



CABLE NOTES:

- 1) Connections should be made using shielded, twisted-pair wires. We recommend using Consolidated 24-gauge, 3-pair shielded cable, part no. CL-5756 or equivalent.
- 2) Only one wire of the twisted pair is used for signal common.
- 3) The audio input cable should be a shielded, twisted pair cable.
- 4) BNC composite video cable - 75-ohm RG6 recommended.
- 5) Twisted pair video cable - Unshielded twisted-pair wire recommended.

DATE DRAWN: 03/14/03	DRAWN BY: D.W.S.	REQUESTED BY: T.E.	 C.E. ELECTRONICS, INC. 2107 Industrial Drive Bryan, Ohio 43506 (419) 636-6705
BOARD NUMBER: 2872	LAST DATE REVISED: 10/14/05	APPROVED BY:	
PRODUCT			
DWG. NO. CE2872A2			REV. E